



Received: 16.05.2020  
Accepted for printing: 3.08.2020  
Published: 05.11.2020  
License: CC BY-SA 4.0

DOI: 10.15584/jetacomps.2020.1.5

LADISLAV RUDOLF<sup>1</sup> , DANIEL NOVÁK<sup>2</sup>, JÁN PAVLOVKIN<sup>3</sup>,  
VIKTOR NOVÁK<sup>4</sup>

## Optimization of Vehicles' Trajectories by Means of Interpolation and Approximation Methods in Education in Technical Fields of Study

<sup>1</sup> ORCID: 0000-0001-9350-6278, Doc., Ing., Ph.D., University of Ostrava, Faculty of Education, Department of Technical Education, Czech republic

<sup>2</sup> Doc., JUDr., Ing., CSc., Matej Bel University, Faculty of Natural Sciences, Department of Technology, Slovakia

<sup>3</sup> Ing., Ph.D., Matej Bel University, Faculty of Natural Sciences, Department of Technology, Slovakia

<sup>4</sup> Ing., Ph.D., Czech University of Life Sciences Prague, Faculty of Engineering, Department of Electrical Engineering and Automation, Czech Republic

### Abstract

The need to optimize the trajectory of vehicles is still highly topical, regardless whether the means of transport are robots, forklifts or road vehicles. It is not only important the safety by passing obstacles, but also the energy balance, i.e. the energy expended on the movement of the vehicle and on the change of its direction. This paper presents a mathematical approach to solving this problem through interpolation and approximation curves. This is a very important scope of knowledge for the education of future engineers.

**Keywords:** means of transport, trajectory optimization, interpolation curves, approximation curves

### Introduction

Movement of vehicles only rarely proceeds in a straight line. On the contrary – regardless whether transporting material or people into smaller or larger distances, it is almost always necessary to deal with obstacles on the path. This includes both safe avoiding obstacles and selecting the best possible trajectory from several possible options. Choosing the optimal trajectory makes thus the movement safer, may reduce the transportation costs and last but not least it may also save time.

Mathematically it is possible to perform an interpolation or an approximation of the trajectory. These mathematical procedures are used in this case as generating principles, which allow to model continuous arcs of the line. While by an interpolation the curve always passes all the associated points, by an approximation the curve passes only the first and last point, and does not have to include necessarily other associated points, which depends particularly on the given approximation function. From the mathematical point of view, it does not matter whether it is about the movement of a mobile robot in a production hall, a forklift in a storehouse or a road vehicle on a street (Kvasnová, 2008).

### Ferguson interpolation curve

Ferguson interpolation curve of third degree allows an easy following of individual sections. The mathematical description of Ferguson curve bases on the position vectors  $\vec{G}$  a  $\vec{H}$ , respective points G and H, as well as on the tangent vectors  $\vec{g}$  and  $\vec{h}$  of the curve at these points. Ferguson curve is then given by equation (1) (Farin, 1993),

$$P(v) = \vec{m}.v^3 + \vec{n}.v^2 + \vec{p}.v + \vec{q}, \quad (1)$$

where:

$\vec{P}(v)$  – position vector of a point of the curve,

$\vec{m}$ ,  $\vec{n}$ ,  $\vec{p}$ ,  $\vec{q}$  – coefficients' vectors,

$v$  – a parameter, for which is true that  $\vec{P}(0) = \vec{G}$  a  $\vec{P}(1) = \vec{H}$ .

Performing the corresponding calculation, we obtain the vectors  $\vec{m}$ ,  $\vec{n}$ ,  $\vec{p}$ ,  $\vec{q}$ , expressed by four equations (2), (3), (4) a (5)

$$\vec{m} = 2\vec{G} - 2\vec{H} + \vec{g} + \vec{h} \quad (2)$$

$$\vec{n} = -3\vec{G} + 3\vec{H} - 2\vec{g} - \vec{h} \quad (3)$$

$$\vec{p} = \vec{g} \quad (4)$$

$$\vec{q} = \vec{G} \quad (5)$$

Ferguson curve can also be expressed in form:

$$\vec{P}(v) = A(v)\vec{G} + B(v)\vec{H} + C(v)\vec{g} + D(v)\vec{h}, \quad (6)$$

where:  $A(v)$ ,  $B(v)$ ,  $C(v)$  a  $D(v)$  are third degree polynomial, for which is true:

$$A(v) = 2v^3 - 3v^2 + 1 \quad (7)$$

$$B(v) = -2v^3 + 3v^2 \quad (8)$$

$$C(v) = v^3 - 2v^2 + v \quad (9)$$

$$D(v) = v^3 - v^2 \quad (10)$$

If we select in equation (7), (8), (9) and (10) the parameter  $v$  of the interval  $\langle 0,1 \rangle$ , then we obtain a smooth curve that starts at point G and ends at point H. This type of curve is relatively suitable for modeling the trajectory of vehicles, since it ensures – due to appropriate choice of control points – safe passage of obstacles, although the length of the trajectory may increase.

### Bezier interpolation curve

Bezier interpolation curves allow simple networking of following segments because the first two and the last two control points define a tangent to the curve at the endpoints. The touch vectors at the endpoints are determined by equations (11) and (12) (Pavlovkin, Jurišica, 2003a, 2003b):

$$C'(0) = n(B_1 - B_0) \quad (11)$$

$$C'(1) = n(B_n - B_{n-1}), \quad (12)$$

where:  $n$  is the degree of the curve.

On the other hand, Bezier interpolation curve may cause – by selecting identical control points as by Ferguson curve – a risk of collision with an obstacle, moreover, the length of the trajectory increases.

### Interpolation B-Spline curve

B-Spline curves exhibit many useful properties, in particular the parametric continuity  $C^2$  of third degree curves, so that they can also be used as interpolation curves. The parametric continuity  $C^i$  defines in which way are the respective curves connected; the index of the continuity indicates the equality of respective  $i$ -derivates of the end-points of the individual curves; i.e. the continuity  $C^0$  indicates that the curves are connected with an edge (the first derivatives are not equal), the continuity  $C^1$  enables a smoother connection of the curves (as the first derivatives are equal) but with different convexity or concavity and thus with an abrupt change of centripetal acceleration. The continuity  $C^2$  ensures that the connected curves have the same convexity (concavity), as the both second derivatives are equal. The computation can be performed by means of two methodes – matrix inversion or searching for Bezier's control points.

Matrix inversion is a general method which can be used for all curves. If we can – based on the control points – calculate the coordinates of some points on the curve, then it is possible by the inverse procedure to determine the control points from known curve’s points, too. The point, where the respective segments are continuing, lies in the anti-centroid of the triangle, defined by three consecutive control points. The location of the anti-centroids is obtained by following construction, which is depicted graphically in Figure 1. The initial point of the arc  $P(0)$  is a point of the median connecting the edge  $P_1$  and the center of the opposite side  $P_0P_2$  of the triangle  $P_0P_1P_2$ , which lies in one third of the length of the median line from the edge  $P_1$  (anti-centroid of the triangle  $P_0P_1P_2$ ). The final point  $P(1)$  of the arc is the anti-centroid of the subsequent triangle  $P_1P_2P_3$ , which lies in one third of the length of the median line from the edge  $P_2$  to the opposite side  $P_1P_3$ .

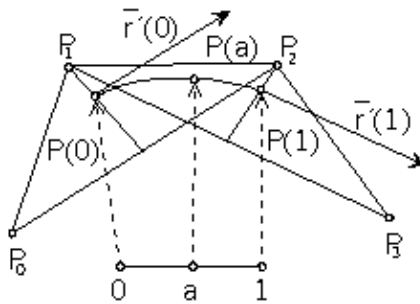


Figure 1. Construction of the anti-centroid (Novák)

Searching for Bezier’s control points is basically an extension of Cardinal curves method, allowing to obtain a continuous  $C^2$  curve. Bezier’s control points  $V_i$  are located at the distance  $d_i$  from the interpolation points  $P_i$ ; this ensures  $C^1$  continuity. If the curve  $C^2$  is to be continuous, it must be satisfied (13):

$$P_1 - 2(P_1 - d_1) + (P_0 + d_0) = (P_2 - d_2) - 2(P_1 + d_1) + P_1 \quad (13)$$

The sections  $d_0$  and  $d_n$  we have to choose. Subsequently, we calculate the coefficients  $A_i$  and  $B_i$  and then we recursively calculate also the remaining sections  $d_{i-1} = A_{i-1} + B_{i-1}d_i$ , thus obtaining the Bezier’s control points. The possibility to choose the tangential vectors at the endpoints is a great advantage by vehicles, since the initial vector should have the same direction, as the vehicle is oriented. Thus it will not be necessary to turn the vehicle before starting the movement along the trajectory.

B-Spline curves obtained by both of these methods are almost the same (as we are looking for the same control points), and they differ only at the edges

(different choice of tangential vectors at the endpoints). However, the method of searching for Bezier's control points is more preferred, as it is significantly faster than the matrix inversion method. Additionally, interpolation B-Spline curves are like Bezier curves susceptible to creating "loops" and therefore they are used only where the development of such drawbacks does not mind or is excluded (Pavlovkin, Jurišica, 2003a, 2003b; Demidov, 2003).

### Bezier approximation curves

General Bezier curves allow an approximation of  $n + 1$  given points by an  $n$ -degree curve. The curve is described by the equation (14):

$$C(t) = \sum_{i=0}^n B_i^n(t) P_i \quad t \in \langle 0, 1 \rangle \quad (14)$$

The basis functions of Bezier curves  $B_i^n(t)$  constitute Bernstein base polynomials:

$$B_i^n(t) = \binom{n}{i} t^i (1-t)^{n-i} \quad (15)$$

General Bezier curves have a relatively high smoothing ability, so that they are only marginally nearing to the individual control points. This is considerably disadvantageous in some applications, but elsewhere it may be useful; it depends on the specific conditions in which the vehicle is moving.

The general disadvantage of Bezier curves is the non-locality of changes – each point of the curve is influenced by all control points; i.e. changing an individual control point changes the shape of the whole curve. Therefore Bezier curves often consist of shorter segments. This way it is possible to obtain the locality of changes and to simplify the difficulty of the calculation, while maintaining all the advantages of the curves. To connecting individual sections, Bezier curves of third degree are mostly used. Basis functions can be determined in advance, since the order of the curve is always known at the beginning.

### B-Spline


Classic B-Spline curve is formed by linking Coons curves in such a way that the last three control points of one segment are identical to the first three points of the next section. In most cases there are used Coons curves of the third degree. The first segment is then determined by the points  $P_0, P_1, P_2$  and  $P_3$ , the second segment by the points  $P_1, P_2, P_3$  and  $P_4$ . The last point of the first segment and the first point of the second segment are identical, as they lie in the anti-centroid of the same triangle; thus the  $C^0$  continuity is ensured (Demidov, 2003).

Joining of the individual sections is very smooth. B-Spline curves ensure the continuity  $C^{k-1}$  in the joint point, where  $k$  means the degree of the curve; i.e. B-Spline curve of the third degree guaranties a  $C^2$  continuity. Using a Bezier curve, only the  $C^1$  continuity is ensured. B-Spline curve therefore retains all the advantages of Bezier curves and it is a lot smoother when connecting the individual sections. B-Spline curve, however, has one major disadvantage – it does not pass the outermost points of the control polynomial. It can be removed by any of the control points will be multiple (Demidov, 2003).

If one control point is double, then the curve is significantly closing to that control point, and in a certain section it may even overlap the control polynomial. If the control point is triple, then the curve passes directly through this control point and it in the surroundings of such point it is identical with the control polynomial; however, this feature is useful only for the endpoints. So if the endpoints of the control polynomial are triple, the curve will interpolate the endpoints. The disadvantage is that near the endpoints the curve degenerates into line segments and it loses its smoothness. Another, more efficient method is to use different basis functions for the first two and the last two sections of the curve so that the curve passes through the endpoints. However, this method requires at least seven control points, so it cannot be used for simpler trajectories.

### Interpolation by Ferguson curve

The interpolation by Ferguson curve, which is depicted in Figure 2, is a suitable method for optimizing specific vehicles' trajectory, but it must be expected that the length of the trajectory gets extended compared to the direct path. The vehicle does not have to stop at the edges of the control polynomial; it has only to slow down sufficiently respected to the radius of turn. With this option of control points, the trajectory passes in a safe distance from individual obstacles and thus the risk of collision with one of the obstacles is eliminated.

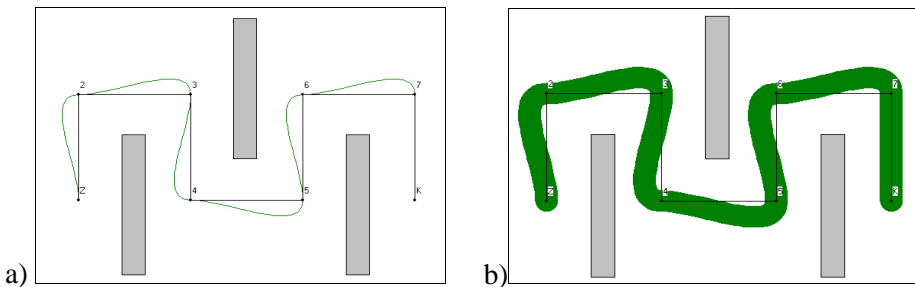


**Figure 2. Interpolation by Ferguson curve (Pavlovkin):**  
**a) for a pointwise vehicle; b) for a real vehicle**


The calculation of the interpolation is always performed every second point. An element of the array has the coordinates of the point  $(x, y)$ ; an empty element of the array has the coordinates  $(-1, -1)$ . The drawing of the interpolation curve is solved by means of the C++ graphics program Borland Delphi 2.0. This program draws the Ferguson curve basing on two given points and respective direction vectors at these points.

### Interpolation by Bezier curve

Interpolation by Bezier curve, shown in Figure 3, is by the specified setup of control points inappropriate for generating the trajectory of a vehicle, as it causes collisions with obstacles. Total length of the path is also substantially greater than by the interpolation by Ferguson curve. For use in a real environment, it would be necessary to change the coordinates of points 3, 4, 5 and 6 to achieve the desired path. The collision-free path of the vehicle for this way changed points is demonstrated in Figure 4. From the comparison of trajectories in Figure 3 and Figure 4 it is apparent that the selection of the supporting points affects significantly the length and the shape of the trajectory. However, a suitable arrangement of the individual control points enables creating a usable trajectory, provided it is possible in respect to the location of the obstacles.

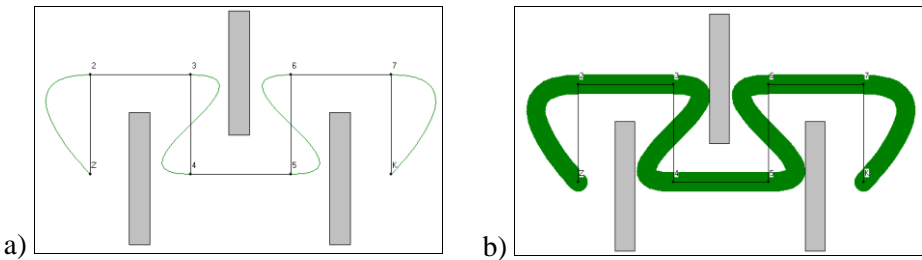


**Figure 3. Interpolation by Bezier curve (Pavlovkin):**  
a) for a pointwise vehicle; b) for a real vehicle

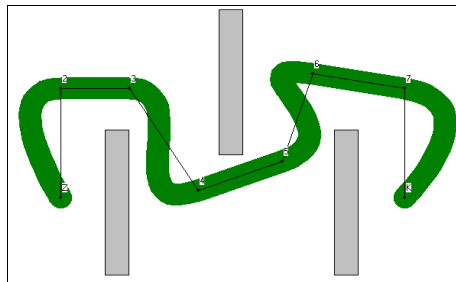


**Figure 4. Interpolation by Bezier curve after changing the coordinates of the control points (Pavlovkin)**

### Approximation by Ferguson curve

Unlike the preceding interpolation cases, by an approximation the trajectory does not necessarily include the control points along the path. Approximation by Bezier curve, which is depicted in Figure 5, is more convenient and shorter than the preceding two cases, but a large-size vehicle may interfere with an obstacle, as shown in Figure 5b. The possibility of such a conflict can be avoided by changing the coordinates of the control point 4; the subsequent change in trajectory is demonstrated in Figure 6. In such setup of control points, it is also possible by an appropriate shifting of the point 6 to shorten the overall length of the trajectory.

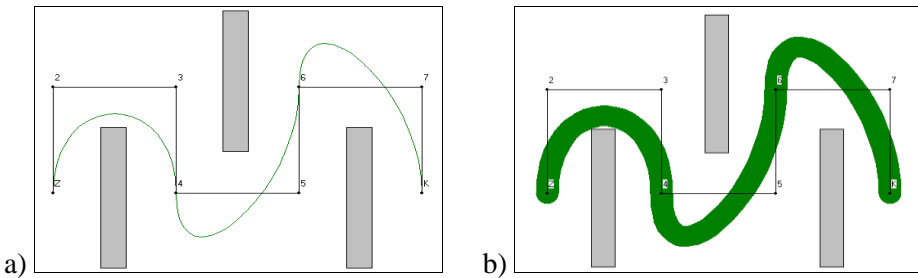

**Figure 5. Approximation by Ferguson curve (Pavlovkin):**  
a) for a pointwise vehicle; b) for a real vehicle

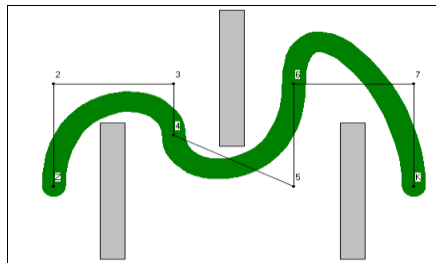


**Figure 6. Approximation by Ferguson curve after changing the control point 4 (Pavlovkin)**

### Approximation by Cubic B-Spline

By approximation of a piecewise linear trajectory by means of Cubic B-Spline curve we obtain a trajectory, which is shorter and smoother, and thus less time- and energy-consuming. The vehicle moves smoothly along such trajectory, i.e. with a smooth change of direction and speed of its movement, as depicted in Figure 7 (Pavlovkin, 1999; Demidov, 2003).

The basic principle of generation of B-Spline curves is that we define Bezier curves of degree  $n$  at intervals  $(u_i, u_{i+1})$ ; where  $n$  is the degree of the polynomial of the respective B-Spline curve and  $L$  is the number of segments of the B-Spline. So we create a sequence of points, namely the sequence  $u_0 \dots u_{L+2n-2}$ . Not all points  $u_i$ , however, are different; if  $u_i = u_{i+1}$  then it is a multiple point.



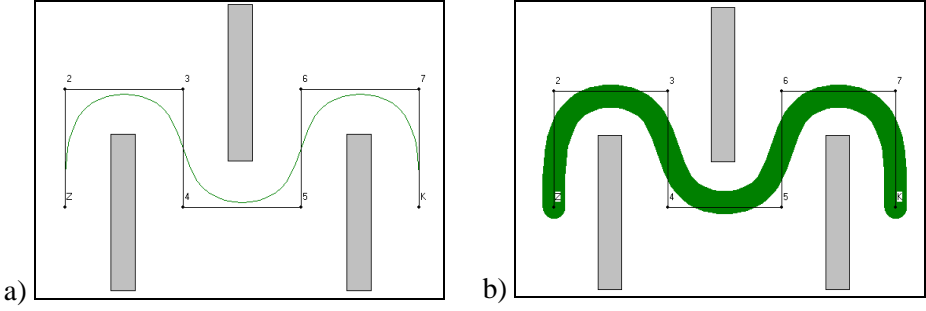

**Figure 7. Approximation by Cubic B-Spline (Pavlovkin):**  
a) for a pointwise vehicle; b) for a real vehicle

To define B-Spline we use the interval  $(u_{n-1}, u_{n+L-1})$  as its domain, these points are called domain points, while  $L$  means the potential number of segments of the curve. If all domain points are simple, then  $L$  is also the number of domain intervals. For every multiplicity of a domain point, the number of domain intervals reduces by one. The sum of multiplicity of all domain points corresponds with  $L$ , as it true that:

$$\sum_{i=n-1}^{L+n-1} r_i = L + 1, \quad (16)$$

where:  $r_i$  means the multiplicity of domain points  $u_i$ .

For generating the B-Splines we used De Boor's algorithm. Let's true that:  $u \in [u_I, u_{I+1}] \subset [u_{n-1}, u_{L+n-1}]$ . We define:

$$d_i^k(u) = \frac{u_{i+n-k} - u}{u_{i+n-k} - u_{i-1}} d_{i-1}^{k-1}(u) + \frac{u - u_{i-1}}{u_{i+n-k} - u_{i-1}} d_i^{k-1}(u) \quad (17)$$

where  $k = 1, \dots, n - r$  and  $i = I - n + k - 1, \dots, I + 1$

which is the degree of B-Spline given the parametr  $u$ .

$$s(u) = d_{I+1}^{n-r}(u), \quad (18)$$

while  $d_i^0(u) = d_i C$ .

## Conclusion

An overall comparison of the various options optimizing of the vehicles' movement between obstacles give the best results for the approximation based on Cubic B-Spline (Pavlovkin, Jurišica, 2003a, 2003b). The mathematical model of such trajectory exhibits fluency, both in terms of necessary speed changes,

and regarding the smoothness of the change of direction. Important is also the fact that of all the analyzed trajectories this one is the shortest, which yields energy saves. Although the shortening of the trajectory need not be regarded as considerable, compared to other options, the total saving of energy may be high, in particularly over a longer period of time or if the same trajectory repeats regularly several times (stock houses, factories, agricultural activities). Finally, it has to be pointed out that the trajectory approximated by Cubic B-Spline exhibits relative high level of safety, as it passes all the obstacles – unlike some other trajectories – with sufficient distance and virtually eliminates any possibility of collision of the vehicle with an obstacle (Kvasnová, 2014).

## Literature

- Demidov, E. (2003). *An Interactive Introduction to Splines*. Retrieved from: <http://www.people.nnov.ru/fractal/Splines/Intro.htm> (8.08.2015).
- Farin, G. (1993). *Curves and Surfaces for Computer Aided Geometric Design. A Practical Guide*. Academic Press, Inc.
- Kvasnová, P. (2008). Univerzálny nakladač a možnosti jeho využitia. In: *Technika odpadového hospodárstva 2008* (p. 70–76). Zvolen: Technická univerzita vo Zvolenu.
- Kvasnová, P. (2014). Posudzovanie rizikových faktorov. *Bezpečná práca: dvojmesačník pre teóriu a prax bezpečnosti práce*, 45(5), 3–9.
- Pavlovkin, J., Jurišica, L. (2003a). Navigácia mobilného robota (1). *AT&P JOURNAL*, 2, 72, 73, 94.
- Pavlovkin, J., Jurišica, L. (2003b). Navigácia mobilného robota (2). *AT&P JOURNAL*, 3, 100.
- Pavlovkin, J., Sudolský, M. (1999). Aplikácie B-splajnov na plánovanie lokálnych ciest mobilného robota. In: *ROBTEP '99 Automatizacian – Robotics in Theory and Practice* (p. 215–220). Košice: Strojná fakulta Technickej univerzity v Košiciach.